




ALL NEW PRO **S7000** SUPER CORN PRO

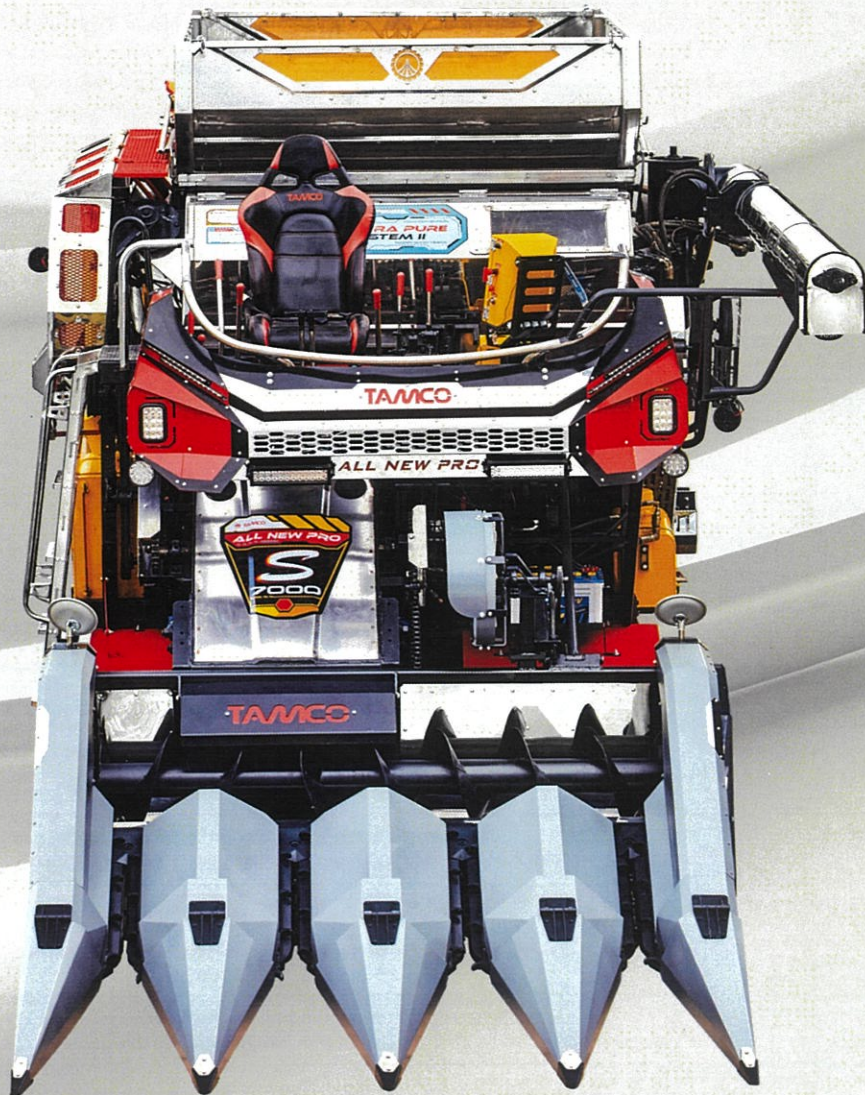


TAMCO KASETPHATTANA COMPANY LIMITED
259 Village No. 1, Don Thong Sub district, Mueang District,
Phitsanulok Province 65000 P.O. Box 99

Tel : (055) 295017-24 Fax : (055) 295027

TAMCO CALL CENTER  **081-480-1234**


LINE QR CODE


SCAN HERE 

 @tamco



FOLLOW US ON

 รถเกี่ยวข้าวแอมโก้

 Tamco Live

www.tamcocombines.com



TAMCO ALL NEW PRO **S7000** SUPERCORN PRO

SPECIFICATION

Size (width x length x height)	3,550 x 6,700 x 2,900 mm. (height when folding the storage tank)	
Roller frame width	1,600 mm.	
Track (width x length x thickness)	Macro connecting the end 123 x 800 x 23 mm.	
Rice storage tank capacity	2,500 kg.	
Tube for delivering rice onto truck	Long rice transmission tube parallel to the ground + Spiral spin motor, 4,500 mm. length	
Fuel tank capacity	150 liters	
Engine	New ISUZU 6HK1 with Turbo	Secondhand engine HINO JO8C with Turbo
Horsepower	261 hp	260 hp
Maximum engine rpm	2,250 rpm	2,900 rpm
Super Corn Model	4R65I	
Corn harvester reel	4 rows	
Row spacing	65 (can be adjusted between 60-70 cm.)	
Corn head hoof	Steel	
Gathering chain	#2060	
Auger diameter	400 mm	
Auger pitch	300 mm	
Reel width	2,730 mm	
Corn head	Whole Corn Bunch	
Header control system	Using one way hydraulic cylinder	
Threshing system	Axial flow threshing drum, specially designed threshing system, reducing loss	
Threshing drum length	1,817 mm. (6 ft)	
Threshing drum diameter	510 mm. (20 inches)	
Cleaning system	Rocker sieve effectively sorts out impurities.	
Drive system	Reduction Gear 15HD specially designed, strong and durable, suitable for combine harvester	
Track chain	High quality track chain, strong and durable, 45 joints	
Roller	Specially designed roller able to withstand heavy workloads Number of 12 balls, 10 lower balls, 2 upper balls	
Guide wheel	High quality, strong, durable guide wheel, 16 inch diameter	
Gear rim	Sprocket rim size 25 teeth, high quality, strong and durable	
Power transmission system	New double hydraulic pump from abroad, 75 cc/round New hydraulic motor from abroad, 89 cc/round	
Suspension system	X Frame is strong, durable and transmits the weight efficiently with spring accelerating track, absorbing shock, extending the service life longer.	
Optimum speed for harvesting	4 km/h	
Performance	4-7 rai per hour (depending on the rice field conditions, rice condition and the driver's ability)	
Loss rate	Approximately 3% (depending on the field conditions, rice condition and the driver's harvest driving method)	
Fuel consumption	3-5 liters per rai (depending on the field conditions, rice condition and the driver's harvest driving method)	
Front-Back mask	Metal	
Guard kit (around the vehicle)	Metal	
Number of workers	1 person	
Manufacturer	Thai Agriculture Machinery Co., Ltd.	